








 ${f H}$ ydraulic platform is recommended for orchards with a row spacing wider than 3,5 m.

Adjustable height and width make the machine ideal for orchard works, such as harvesting fruits, pruning trees or mounting anti-hail nets.

Configure the platform according to your individual preferences - we will do the rest!

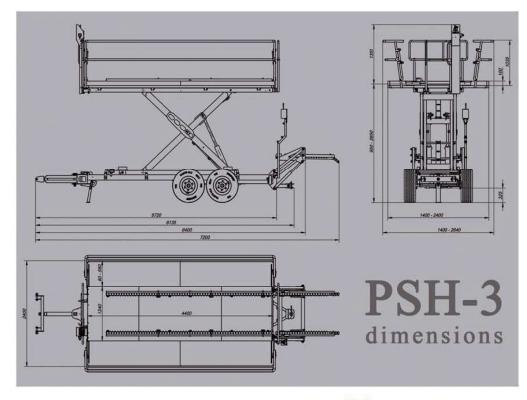



i INFO

Galvanized railings with gas springs for improved safety and comfort.

Easy and quick side unloading of the bins.

Railings with no vertical posts on the sides for collisionfree moving, without hooking tree branches.

HYDRAULIC PLATFORM

PSH-3

TECHNICAL PARAMETERS:

- MACHINE TYPE: TRAILED PLATFORM

WITH HYDRAULIC HEIGHT ADJUSTMENT

- DRIVE SOURCE: TRACTOR - LOAD CAPACITY: 1 800 KG

- MAXIMUM NUMBER OF BINS: 3 PIECES (120 x 100 x 80 cm)

- MAXIMUM NUMBER OF PEOPLE ON THE PLATFORM: 6 PEOPLE OR 600 KG

- WEIGHT: FROM 1 600 TO 1 900 KG (DEPENDING ON THE CONFIGURATION)

- WHEELS: 10.0/75 - 15.3 14 PR

- MODULAR CONSTRUCTION
- TILTING GALVANIZED RAILINGS WITH GAS SPRINGS AND MAGNETIC PINS FOR:
 - FAST AND EASY ACCESS TO ALL BINS WHEN LOADING OR UNLOADING
 - HIGH SECURITY
 - COLLISION-FREE MOVING, WITHOUT HOOKING TREE BRANCHES
 - ADJUSTABLE ANGLE OF INCLINATION
- 3 MM ALUMINUM FLOORING (ANTI-SLIP)
- HYDRAULIC MANIFOLD MOUNTED ON THE PLATFORM
- TORSIONAL HITCH, MOUNTS ON THREE-POINT LINKAGE
- ROAD LIGHTING, SUPPORT FOOT, SERVICE LOCKS FOR THE SCISSOR LIFT, WHEEL WEDGES, WARNING TRIANGLE
- MAXIMUM TRANSPORT SPEED: 25 KM/H

DIMENSIONS:

- HEIGHT ADJUSTMENT: FROM 95 TO 265 CM
- WIDTH ADJUSTMENT: FROM 140 TO 265 CM
- OVERALL DIMENSION (L x W x H):
 - A) FOLDED 572/640* x 162 x 230 cm
 - B) UNFOLDED: 572/720* x 265 x 400 cm
- WORKING PLATFORM DIMENSION (L X W X H):
 - c) FOLDED 440 x 140 CM
 - D) UNFOLDED: 440 x 240 CM
- WHEELBASE: 135 CM - CLEARANCE: 32.5 CM
- *WITH REAR LIFT ADDED (OPTIONAL)

















Platforma hydrauliczna PSH-3 KRÓLIK | Mechaniczne vs hydrauliczne podesty



Platforma hydrauliczna PSH-3 KRÓLIK + wózek pomocniczy



Platforma hydrauliczna PSH-3 KRÓLIK z systemem zdalnego sterowania ciągnikiem GOtrack



Hamulce hydrauliczne w platformie sadowniczej PSH-3 KRÓLIK