



Rear step




Main platform



Front step

Steps in the front and in the back for easier access to the upper bins*

*applies to:
WS/4S/4SH and WS/5S/4SH

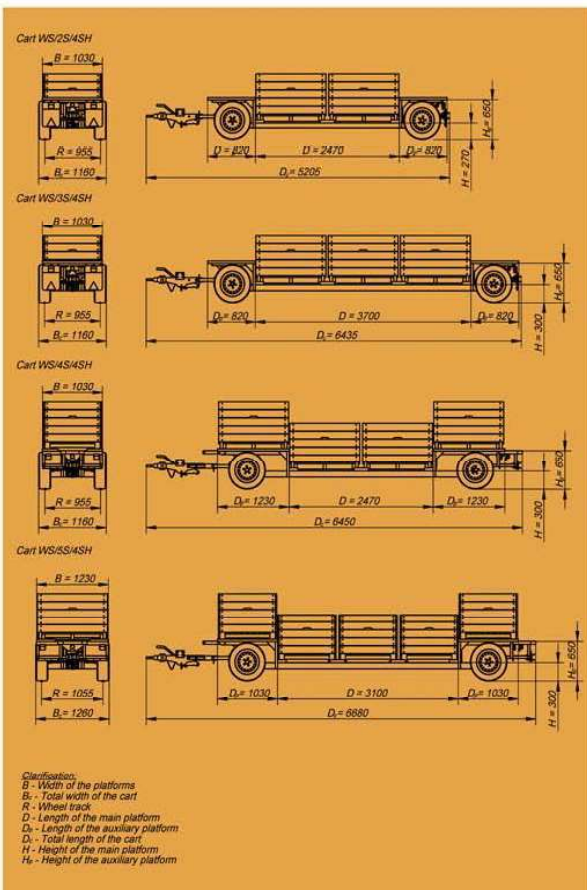

- + Carts equipped with brakes and road lighting are compliant with traffic regulations.
- + Perfect for long distance transport. Use two WS/5S/4SH carts and move 10 bins at a time.
- + Cargo tires with increased load index.
- + Durable and scratch resistant aluminium flooring (anti-slip). Fixed to the frame with and stainless steel rivets.
- + Works with superstructures - transform the cart into a platform. Harvest all fruits in a single pass!

Basic drawbar
- without overrun brake.
(WS/2S/4S and WS/3S/4S carts)



Road lighting is included as standard.



4-WHEEL STEERING CARTS

TECHNICAL PARAMETERS:

- TWO-AXLE CART
- OVERALL DIMENSIONS (L x W x H): 520.5 x 116 x 69 cm
- PLATFORM DIMENSIONS I (L x W): 247 x 103 cm
- PLATFORM DIMENSIONS II AND III (L x W): 82 x 103 cm
- LOADING HEIGHT: 27 cm
- WHEEL TRACK: 96 cm
- GROUND CLEARANCE: 19 cm
- TIRES: 205/60/R15 OR 195/70/R14
- FRONT COUPLING: AZ DIN 74054-40 OR KNOTT KRV 17C*
- REAR HITCH: BPW K80
- ROAD LIGHTING
- LOAD CAPACITY: 1000 KG
- WEIGHT: 435 OR 460* KG

* WS/2S/4SH WITH OVERRUN BRAKE



MODEL & POPULARNOŚĆ

WS/2S/4S



MODEL & POPULARNOŚĆ

WS/2S/4SH



TECHNICAL PARAMETERS:

- TWO-AXLE CART
- OVERALL DIMENSIONS (L x W x H): 643.5 x 116 x 69 cm
- PLATFORM DIMENSIONS I (L x W): 370 x 103 cm
- PLATFORM DIMENSIONS II AND III (L x W): 82 x 103 cm
- LOADING HEIGHT: 30 cm
- WHEEL TRACK: 96 cm
- GROUND CLEARANCE: 20 cm
- TIRES: 205/60/R15 OR 195/70/R14
- FRONT COUPLING: AZ DIN 74054-40 OR KNOTT KRV 17C*
- REAR HITCH: BPW K80
- ROAD LIGHTING
- LOAD CAPACITY: 1400 KG
- WEIGHT: 525 OR 550* KG

* WS/3S/4SH WITH OVERRUN BRAKE



MODEL & POPULARNOŚĆ

WS/3S/4S



MODEL & POPULARNOŚĆ

WS/3S/4SH




TECHNICAL PARAMETERS:

- TWO-AXLE CART
- OVERALL DIMENSIONS (L x W x H): 645 x 116 x 69 cm
- PLATFORM DIMENSIONS I (L x W): 247 x 103 cm
- PLATFORM DIMENSIONS II AND III (L x W): 123 x 103 cm
- LOADING HEIGHT: 30/65 cm
- WHEEL TRACK: 96 cm
- GROUND CLEARANCE: 20 cm
- TIRES: 205/60/R15 OR 195/70/R14
- FRONT COUPLER: KNOTT KRV 17C
- REAR HITCH: BPW K80
- ROAD LIGHTING
- ADDITIONAL STEPS FOR EASIER ACCES TO PLATFORMS II AND III
- LOAD CAPACITY: 1600 KG
- WEIGHT: 580 KG



MODEL & POPULARNOŚĆ

WS/4S/4SH

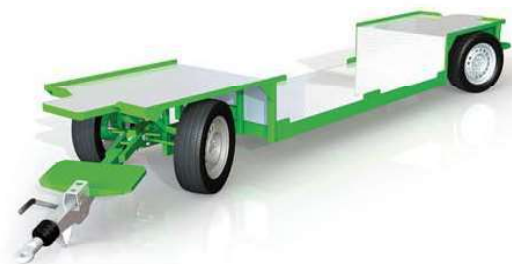

TECHNICAL PARAMETERS:

- TWO-AXLE CART
- OVERALL DIMENSIONS (L x W x H): 668 x 126 x 69 cm
- PLATFORM DIMENSIONS I (L x W): 310 x 123 cm
- PLATFORM DIMENSIONS II AND III (L x W): 103 x 123 cm
- LOADING HEIGHT: 30/65 cm
- WHEEL TRACK: 106 cm
- GROUND CLEARANCE: 20 cm
- TIRES: 205/60/R15 OR 195/70/R14
- FRONT COUPLER: KNOTT KRV 17C
- REAR HITCH: BPW K80
- ROAD LIGHTING
- ADDITIONAL STEPS FOR EASIER ACCES TO PLATFORMS II AND III
- LOAD CAPACITY: 2000 KG
- WEIGHT: 630 KG

NOTE: TRANSVERSELY POSITIONED BINS. FORKLIFT TRUCK NEEDS TO ACCESS THE BINS FROM THE SHORT SIDE TO LOAD THEM.



MODEL & POPULARNOŚĆ

WS/5S/4SH

